

# ALUSCREEN

Standard movable screen


**myo**

## AESTHETIC BENEFITS

Single or double-fillings  
Frame: 3 colors  
Large choice of fillings  
2 kinds of feet

## TECHNICAL BENEFITS

Large size  
With or without castors  
Easy to move  
Levelling screw to adjust in case of uneven floor  
Junction from 2 to 4 panels  
Product adaptation on demand

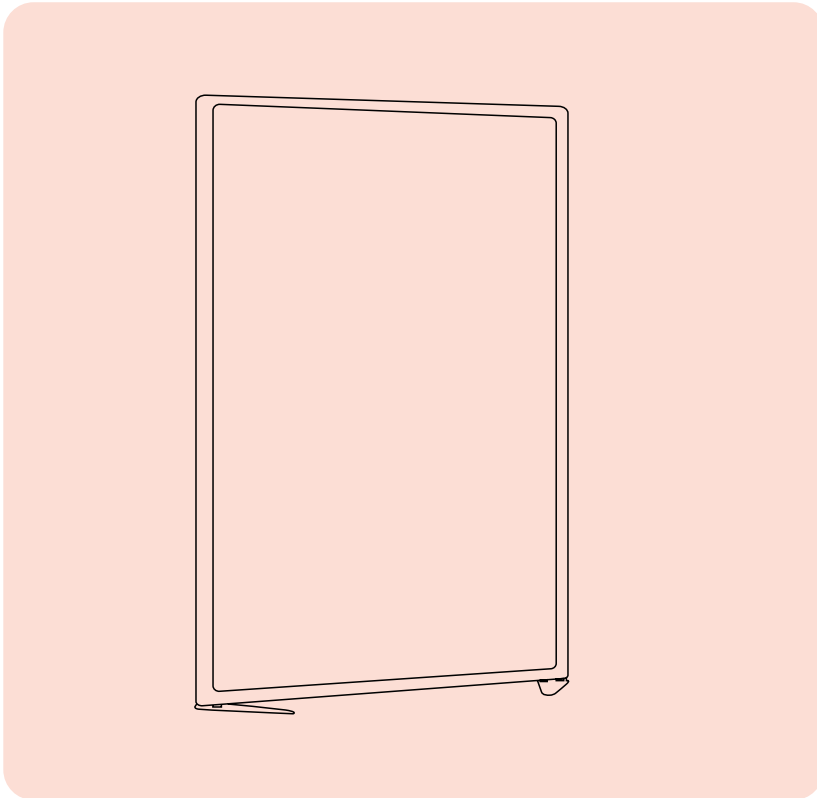

MYO\_FP-05.2023

5 YEARS  
Guarantee



Since 2014


# ALUSCREEN

## Standard movable screen

Flexible and modular, the Aluscreen acoustic movable screen structures spaces. It consists of an aluminum frame and an acoustic and customizable filling, to provide both visual and acoustic comfort.

FIXINGS	FRAME	FILLINGS	FINISHES		
2 boomerang feet	Aluminium 33mm thick	SINGLE-FILLING	MELAMINE	ATLANTIC FABRIC* 100% polyester <i>*Also available with HUSH / TWIST / TWIST-MELANGE fabric</i>	Glass Polycarbonate Magnetic whiteboard
9010 FTC 7016 FTC 7016 FTC	9010 FTC 7016 FTC Satin anodised	DOUBLE-FILLINGS	<b>3 colors</b> White (020TST) Light grey (625TST) Atlas oak (H851BST)	<b>6 colors</b> (ref. 60011-61078-63034-65037-66062-68054)	

### Boomerang foot

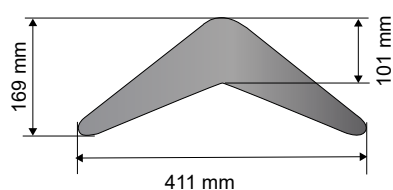

### Frame



## Options



SMART RAIL  
specific transom



CASTORS  
(sur pieds boomerang)



STAR PROFILE  
for joining 2 to 4 panels

# ALUSCREEN

Standard movable screen

myo-solutions.com

## Dimensions & Average weights

std width (mm)	800	1000	1200
std height (mm)	1500	1500	1500
	1700	1700	1700
		2000	2000


**SINGLE-FILLING <sup>(1)</sup> / DOUBLE-FILLINGS <sup>(2)</sup> (transom: 1050mm)**  
**AVERAGE WEIGHTS (kg)** Without packaging

Melamine Fabric	17-20 kg	22-28 kg	25-33 kg
--------------------	----------	----------	----------

**SINGLE-FILLING <sup>(1)</sup>**  
**AVERAGE WEIGHTS (kg)** Without packaging


Glass Magnetic whiteboard	18-20 kg	22-24 kg (not available in 2000 mm)	-
Polycarbonate	10-12 kg	13-14 kg (not available in 2000 mm)	-

**<sup>(1)</sup> SINGLE-FILLING:**

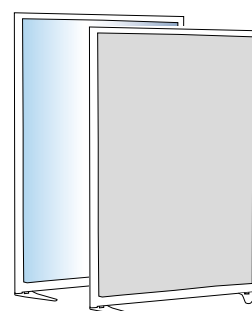

Aggloméré revêtu mélaminé / tissu  
Glass / Polycarbonate  
Magnetic whiteboard

**<sup>(2)</sup> DOUBLE-FILLINGS:**

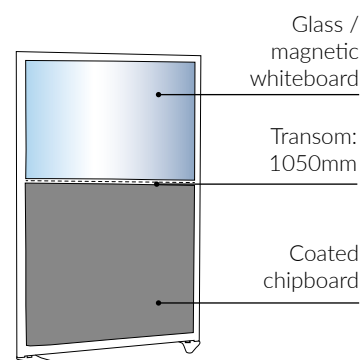

## Product Adaptation

In made-to-measure orders, the maximum dimensions of the Aluscreen standard movable screen are:

- width= 1200 (to be confirmed according to fillings)
- height= 2000 mm (except with full glazing : 1700 mm)

A different finish in a fabric other than those offered by myO is possible after validation of the technical and dimensional characteristics.

Frame: can be lacquered in most colours in the RAL range

# ALUSCREEN

Standard movable screen

myo-solutions.com

## Fixing systems

The panel is delivered with ordered number of feet (min. 2)  
+ 2 finishing bands  
+2 connection bands

Estimated  
installation  
time **5 mn**  
/foot




Finish band




Link strip for joining  
2 panels




Adjusting screw



1 movable screen = 2 feet




2 movable screens = 3 feet




X 1 movable screen  
= X feet + 1 foot

ex : 5 movable screens  
= 5 feet + 1 = 6 feet

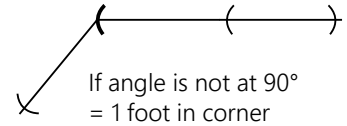

If angle is not at 90°  
= 1 foot in corner

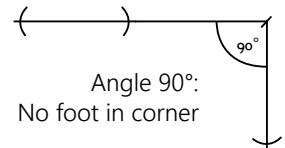

Angle 90°:  
No foot in corner



## Assembly

To allow careful assembly, myO products are delivered with: assembly instructions + a pair of cotton gloves.