

BOX

Mood Box [+]

myo

100% RESPONSABLE



Materials selected with environmental labels
Made in France

100% COMFORT

High performance acoustic sound insulation and correction
Air renewal
Automatic Lightnings
Large tablet
Integrated electric kits

100% EASY


Choice of configuration, dimensions, layout and finishes

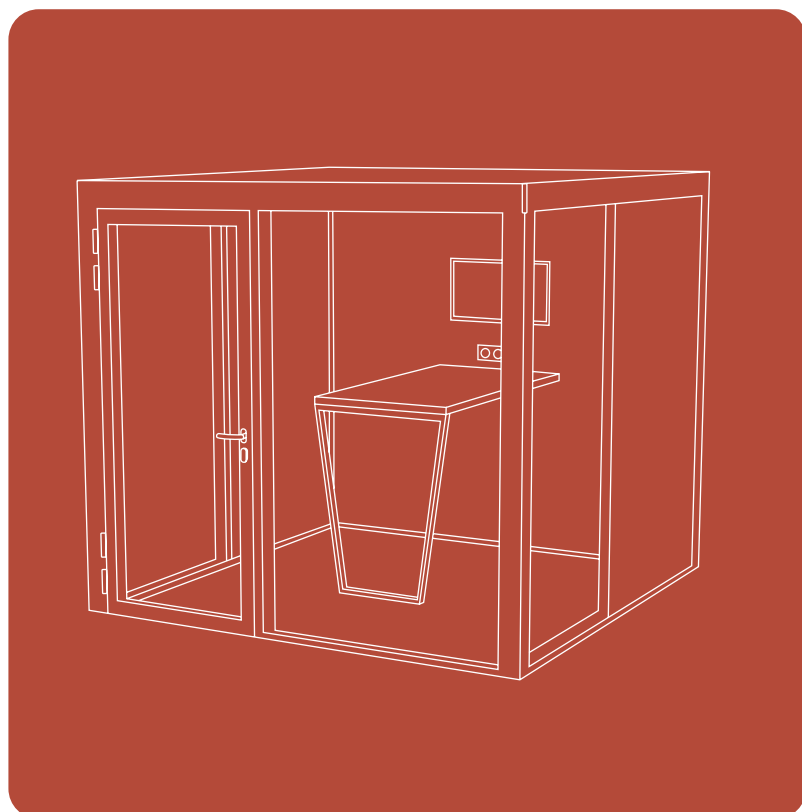

MYO_FP-05.2023

2-YEAR
Guarantee

Except electrical consumable



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100



Since
2018

BOX

Mood Box [+]

myo-solutions.com

Responsible Product



FDES sheet & certificates are available on request.



PET
1000 to 5000
Recycled bottles

Used to make the interior panels.



100% recyclable
Glazings
Aluminium structures
External panels



Easy maintenance



Raw or fabric covered polyester fibre panel:

Regularly vacuum (soft textile brush)

A stain?

Proceed as follows:

- First, use a plain white rag or paper towel to soak up as much of the spilled liquid as possible.
- If the stain is dry, vacuum to remove as much residue as possible.
- Rub gently with a clean white cloth.
- Dab the fabric with a dry kitchen towel or plain white paper towel each time you add liquid to soak up the liquid and dirt.
- Use plain, soap-free water for the last wash.

Melamine panels, glass surfaces, aluminum structure:

Maintain with standard commercial cleaning products or soapy water, except for any corrosive product.

The majority of the components of the product are 100% recyclable.

The product must be dismantled and each element sorted and disposed of in the appropriate channels.

BOX

Mood Box [+]

myo-solutions.com

Basic Configurations



- Configuration 1

- 4 aluminium angles
- 1 solid side
- 3 glass sides
- 1 full height glass door



- Configuration 2

- 4 aluminium angles
- 2 solid sides
- 2 glass sides
- 1 full height glass door



- Configuration 3

- 4 aluminium angles
- 1 solid side
- 2 solid/glass sides
- 1 glass side
- 1 full height glass door



- Configuration 4

- 2 aluminium angles + 2 glass edge-to-edge angles with anodised or lacquered
- 1 solid side
- 3 glass sides
- 1 full height glass door



- Configuration 5


- 2 aluminium angles + 2 glass edge-to-edge angles with anodised or lacquered
- 1 solid side
- 2 solid/glass sides
- 1 glass side
- 1 full height glass door

BOX

Mood Box [+]

myo-solutions.com

Dimensions

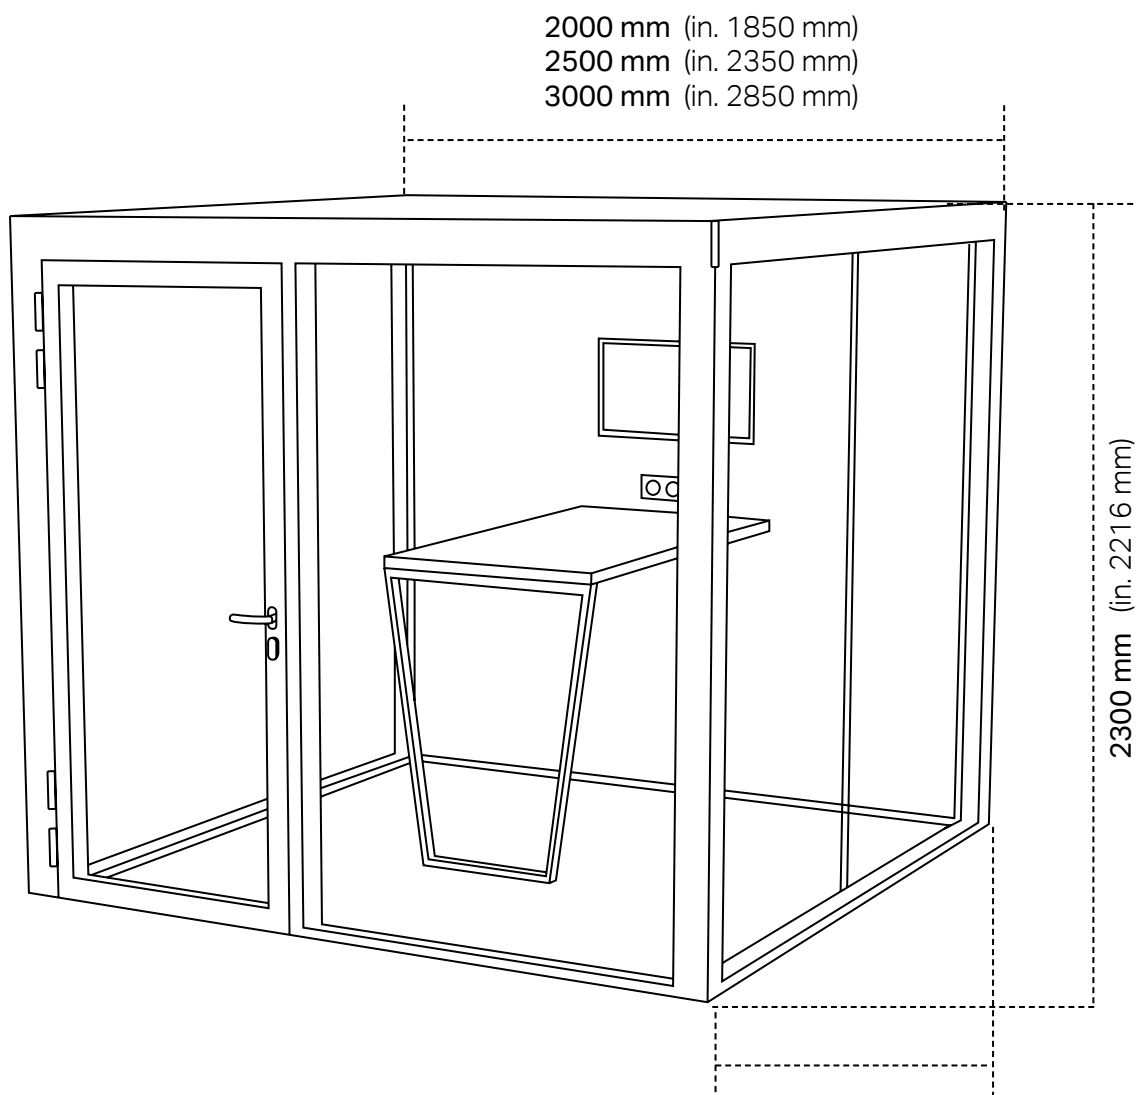

Ground surface:
4 m² to 12 m²

Door: L.930 x H. 2151mm
Free passage: width = 810mm

BOX


Mood Box [+]

myo-solutions.com

Acoustic



Wood Box > Outside
-42dB

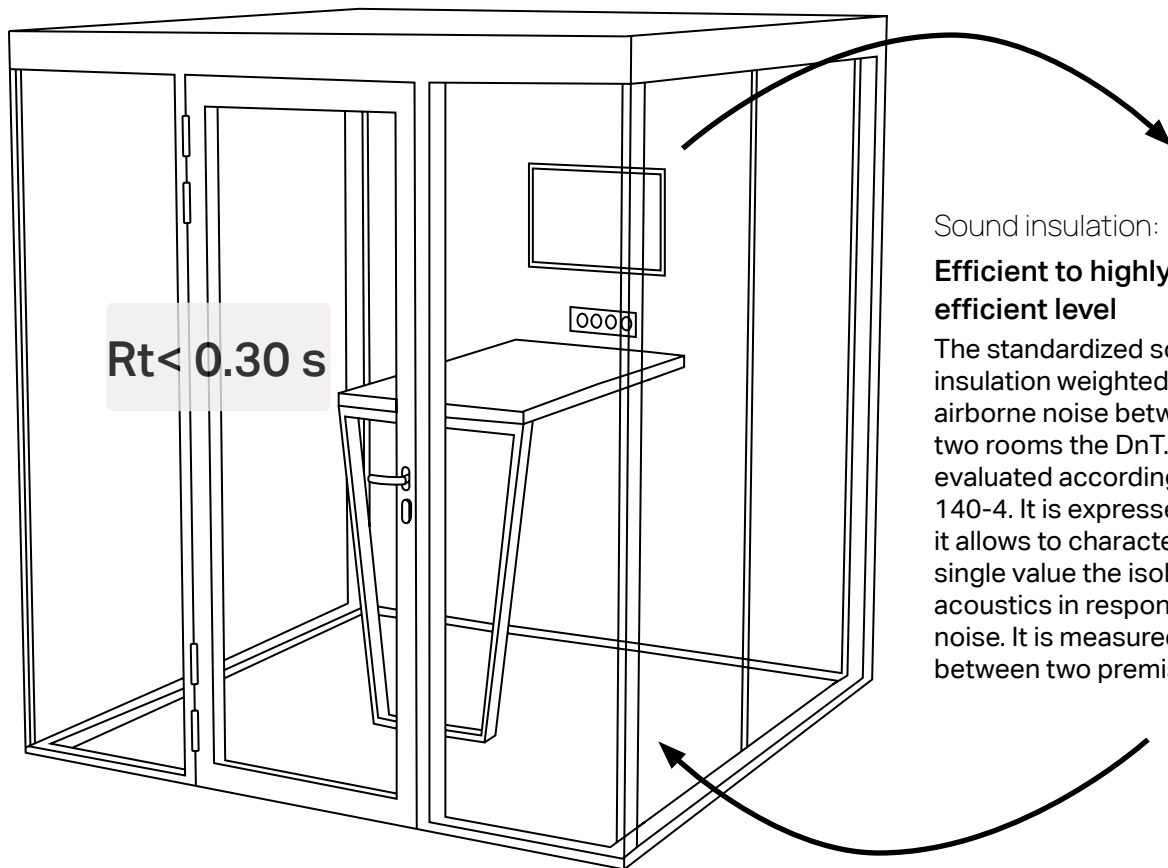

Sound insulation:

Efficient to highly efficient level

The standardized sound insulation weighted to airborne noise between two rooms the $D_{nT,A}$, is evaluated according to ISO 140-4. It is expressed in dB, it allows to characterize by a single value the isolation acoustics in response to noise. It is measured in situ between two premises.

Rt < 0.30 s

Sound absorption :

Very efficient level

The reverberation time T_r of a room is the time at end of which the sound level has decreased by 60dB

When a sound source is abruptly stopped. It depends on the absorption surface of the room and its volume (the smaller the volume of the room, the lower the T_r should be).

Outside > Mood Box

-33dB



BOX

Mood Box [+]

myo-solutions.com

Technical Specifications

Structure frame

- RAL 9010 BRI (White)
- RAL 7016 FTC (Anthracite grey)
- RAL 9005 FTC (Black)

Full Inner Filling

Polyester fibre panel,
2 stock colours:

- light grey
- anthracite grey

Solid exterior fillings

Melamine chipboard,
4 colors stock:

- white 020CST
- light grey 625CST
- Atlas oak H851BST
- Élégant black 113 CST

Glass exterior filling

Configuration 1-2-3:

44/2 laminated double glazing, 44/2

Configuration 4-5:

55/2 laminated double glazing (edge to edge)

Porte

Full height glass door, aluminium frame, mounted on 4 hinges with integrated automatic skirting.

Right or left-hand push.

Choice of door hardware

Silver or black colors:



HOPPE -Amsterdam



HOPPE -Amsterdam
With European barrel

Options

1. Aluminium frame in an other RAL colour
2. Interior fabric finish: HUSH by GABRIEL
28 colors | 80% polyester - 20% viscose

BOX

Mood Box [+]

myo-solutions.com

Standard Equipment

Connections

3 possibilities:

- floor
- technical floor
- ceiling

Lighting

Spot with sensor detector

From 2 to 6 spots, Down-light

Integrated LED: 6W - 540 lumens

Electrical connections

Position height: 1200mm (recommended for the table option), 840mm or 300mm from the ground

1 strong current socket

2 USB sockets (A and C type)

Ventilation

Air renewal: from 380 m³/h until

1044 m³/h (depending dimensions)

Optionnal equipments



Table

1200 x 500mm or 1500 x 800mm
Thickness: 40mm - H. 1105mm.

Top in white melamine with wood veneer edges

Legs in white glossy lacquered steel fixed on a solid face



Magnetic white board

H.1000 x W.1500mm

4 mm thick glass board + 0.5 mm galvanised sheet

Wall mounting system with 4 chromed steel brackets (supplied)



If a display is added:

Recommendation:

- Maximum screen size 28 inches
- Fixing system: VESA 100x100

Screen and fixing are not supplied

HDMI - RJ45

HDMI cable entry + strong power socket for the screen

Reinforcement to fix a screen on the inner back: H.1470mm between the axis of the screen and the floor

MYO_FP-05.2023



Assembly

All myO products come with assembly instructions to ensure careful assembly.

