

BOX

Mood Box [1]

myo

100% RESPONSABLE


Materials selected with environmental labels
Made in France

100% COMFORT

High performance acoustic sound insulation and correction
Air renewal
Automatic Lightnings
Large tablet
Integrated electric kits

100% EASY

Choice of configuration, dimensions, layout and finishes

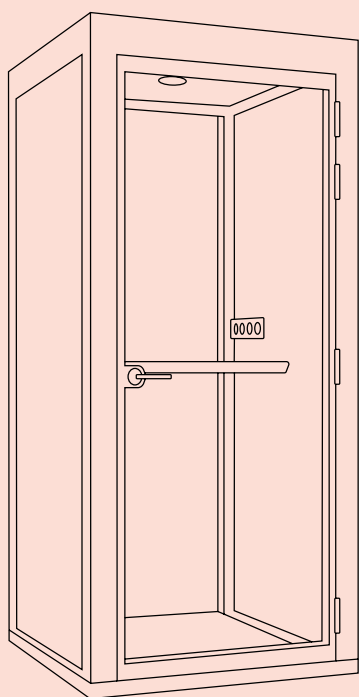

MYO_FP-05.2023

2-YEAR
Guarantee

Except electrical consumable



Since
2018

BOX

Mood Box [1]

myo-solutions.com

Responsible Product



FDES sheet & certificates are available on request.



100%
Manufactured locally



100% recyclable

Glazings
Aluminium structures
External panels



PET

600 Recycled bottles

Used to make the interior panels.



Easy maintenance

Raw or fabric covered polyester fibre panel:

Regularly vacuum (soft textile brush)

A stain?

Proceed as follows:

- First, use a plain white rag or paper towel to soak up as much of the spilled liquid as possible.
- If the stain is dry, vacuum to remove as much residue as possible.
- Rub gently with a clean white cloth.
- Dab the fabric with a dry kitchen towel or plain white paper towel each time you add liquid to soak up the liquid and dirt.
- Use plain, soap-free water for the last wash.

Melamine panels, glass surfaces, aluminum structure:

Maintain with standard commercial cleaning products or soapy water, except for any corrosive product.

The majority of the components of the product are 100% recyclable.

The product must be dismantled and each element sorted and disposed of in the appropriate channels.

BOX

Mood Box [1]

myo-solutions.com

Basic Configurations



- **Configuration 1**
 - 4 aluminium angles
 - 2 full solid perpendicular sides
 - 1 glass side
 - 1 full height glass door



- **Configuration 2**
 - 4 aluminium angles
 - 2 full solid opposite sides
 - 1 glazed side
 - 1 full height glass door

Choosable opening side of the door:


Left pushing.



Right pushing.



Dimensions

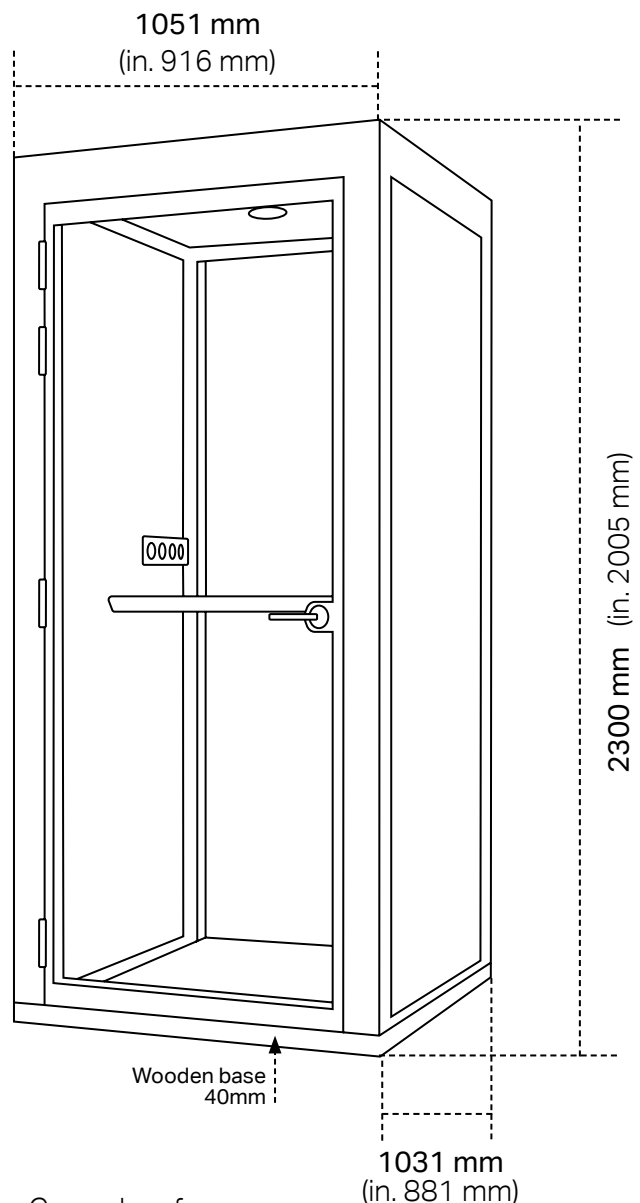

Ground surface:
1,08 m²

Door: L.850 mm
H. 2151 mm (without base) | H. 2111 mm (with base)
Free passage: width = 830mm

BOX

Mood Box [1]


myo-solutions.com

Acoustic



Wood Box > Outside

-36dB

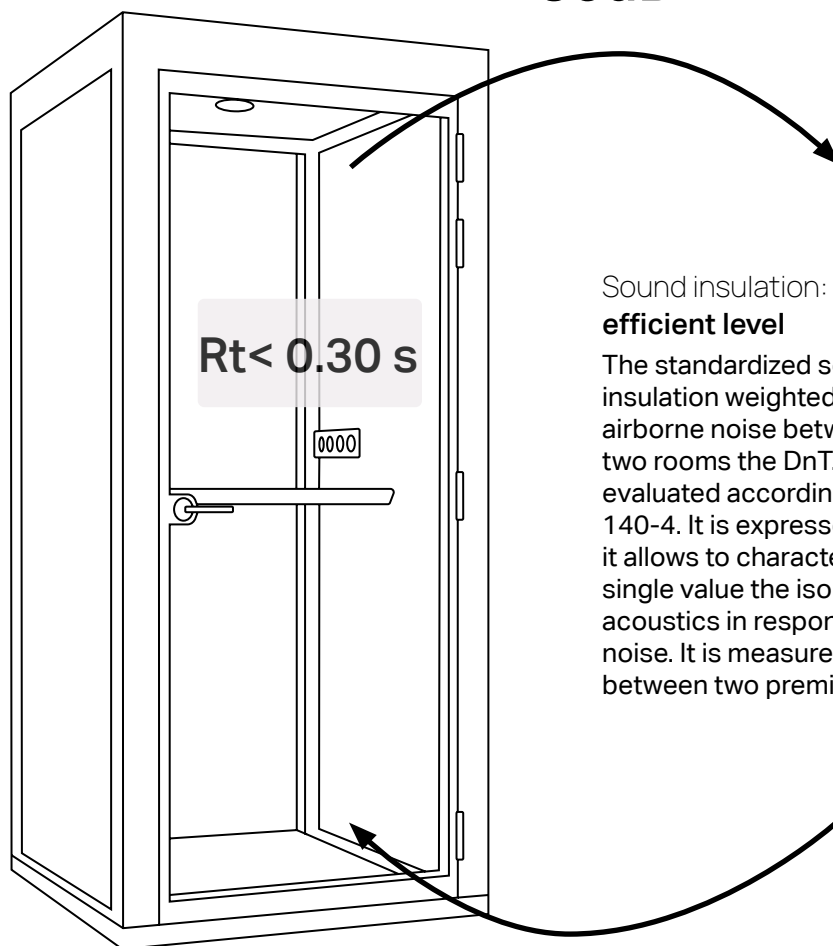

Rt < 0.30 s

Sound absorption:

Very efficient level

The reverberation time T_r of a room is the time at end of which the sound level has decreased by 60dB

When a sound source is abruptly stopped. It depends on the absorption surface of the room and its volume (the smaller the volume of the room, the lower the T_r should be).

Sound insulation:
efficient level

The standardized sound insulation weighted to airborne noise between two rooms the D_nT_A , is evaluated according to ISO 140-4. It is expressed in dB, it allows to characterize by a single value the isolation acoustics in response to noise. It is measured in situ between two premises.

Outside > Mood Box

-29dB



BOX

Mood Box [1]

myo-solutions.com

Technical Specifications

Structure frame

- RAL 9010 BRI (White)
- RAL 7016 FTC (Anthracite grey)
- RAL 9005 FTC (Black)

Full Inner Filling

Polyester fibre panel,
2 stock colours:

- light grey
- anthracite grey

Solid exterior fillings

Melamine chipboard,
4 stock colors:

- white 020CST
- light grey 625CST
- Atlas oak H851BST
- Élégant black

Glass exterior filling

Single laminated glazing, 33/2

Porte

Full height glass door, aluminium frame, mounted on 4 hinges with integrated automatic skirting.

Choice of door hardware,
black or silver colour:



HOPPE-
Paris lock



HOPPE- Amsterdam lock
Box with European barrel
(flow chart management)



MYO_FP-05.2023

Options

1. Aluminium frame in an other RAL colour
2. Interior fabric finish: HUSH by GABRIEL
28 colors | 80% polyester - 20% viscose
3. Wooden base (40mm high)
4. Moving kit

BOX

Mood Box [1]

myo-solutions.com

Standard Equipment

Connections

3 possibilities:

- floor
- technical floor
- ceiling

Lighting

Spot with sensor detector

1 recessed LED down-light 6W - 540 lumens

Working tablet

Position height: 1100mm from the ground

L. 800mm x D. 550mm - Thickness: 40 mm

White melamine top with varnished multi-ply edges

Electrical connections

Position height: 1200mm from the ground

1 strong current socket

2 USB sockets (A and C type)

Ventilation

Air renewal: 160 m³/h

Weight

Without packaging: ±350 kg



Assembly

All myO products come with assembly instructions to ensure careful assembly.

