

# my0

## 100% RESPONSABLE

Materials selected with environmental labels Made in France


## 100% COMFORT

High performance acoustic sound insulation and correction
Air renewal
Automatic Lightnings
Large tablet
Integrated electric kits

## 100% EASY

Choice of configuration, dimensions, layout and finishes























myo-solutions.com

## Responsible Product



FDES sheet & certificates are available on request.




**PET** 700 to 1000 Recycled bottles




100% recyclable Glazings

Aluminium structures External panels







The product must be dismantled and each element sorted and disposed of in the appropriate channels.



## Easy maintenance

### Raw or fabric covered polyester fibre panel:

Regularly vacuum (soft textile brush)

## A stain?

Proceed as follows:

- First, use a plain white rag or paper towel to soak up as much of the spilled liquid as possible.
- If the stain is dry, vacuum to remove as much residue as possible.
- · Rub gently with a clean white cloth.
- Dab the fabric with a dry kitchen towel or plain white paper towel each time you add liquid to soak up the liquid and dirt.
- Use plain, soap-free water for the last wash.

#### Melamine panels, glass surfaces, aluminum structure:

Maintain with standard commercial cleaning products or soapy water, except for any corrosive product.

myo-solutions.com

## Basic Configurations

## 2 DOORS



## Configuration 1

4 aluminium angles 3 full solid sides 2 full height glass doors



• Configuration 2

4 aluminium angles 2 full solid opposite sides 1 glazed side 2 full height glass doors

## Opening of the doors:



## 1 DOOR



## • Configuration 3


4 aluminium angles 3 full solid sides 1 full height glass door



## • Configuration 4

4 aluminium angles 2 full solid opposite sides 1 glazed side 1 full height glass door

### Choosable opening side of the door:




## BOX

# Mood Box [2]

myo-solutions.com

## **Dimensions**

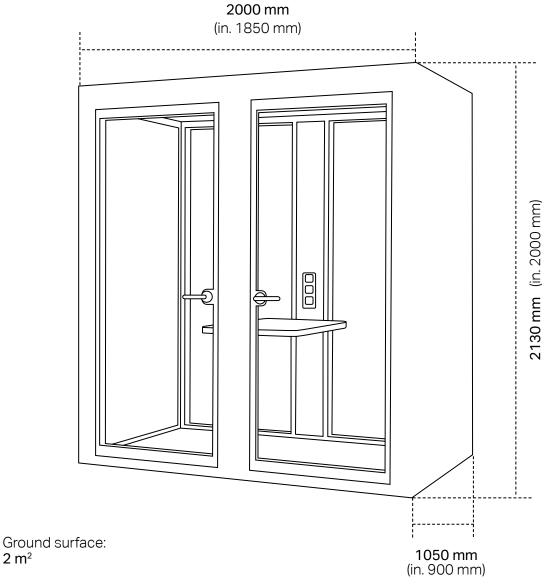


1 or 2 Door(s):

 $2 \, m^2$ 

L.780mm - H. 1935mm Free passage: 830mm

myo-solutions.com

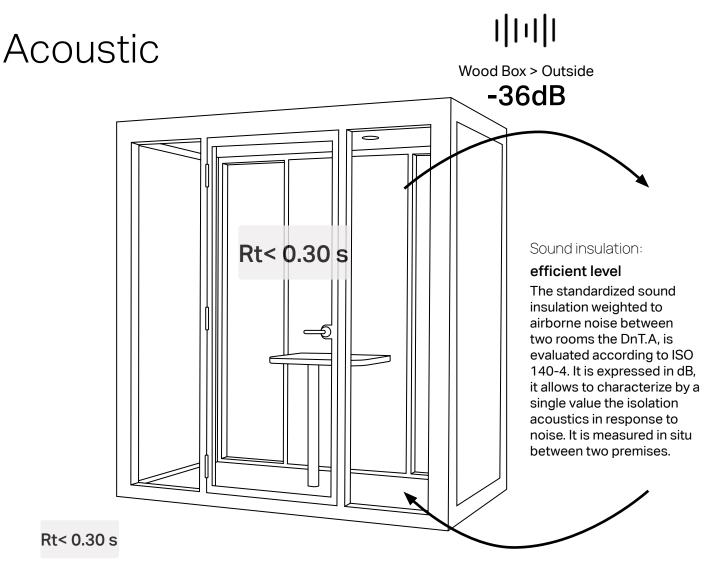

Sound absorption :

### Very efficient level

The reverberation time Tr of a room is the time at end of which the sound level has decreased by 60dB

When a sound source is abruptly stopped. It depends on the absorption surface of the room and its volume (the smaller the volume of the room, the lower the Tr should be).

Outside > Mood Box

-29dB

myo-solutions.com

## Technical Specifications

#### Structure frame

- RAL 9010 BRI (White)
- RAL 7016 FTC (Anthracite grey)
- RAL 9005 FTC (Black)

### Full Inner Filling

Polyester fibre panel, 2 stock colours:

- light grey
- · anthracite grey

## Solid exterior fillings

Melamine chipboard,

- 4 colors stock:
- · white 020CST
- · light grey 625CST
- Atlas oak H851BST
- Elégant black 113 CST

### Glass exterior filling

Single laminated glazing, 33/2

### Porte

Full height glass door, aluminium frame, mounted on 4 hinges with integrated automatic skirting.

## Choice of door hardware, black or silver colour:



HOPPE-Paris lock



HOPPE- Amsterdam lock Box with European barrel (flow chart management)



## **Options**

- 1. Aluminium frame in an other RAL colour
- 2. Interior fabric finish: HUSH by GABRIEL 28 colors | 80% polyester 20% viscose
- 3. Moving kit

myo-solutions.com

## Standard Equipment

Connections

3 possibilities:

- floor
- · technical floor
- · ceiling

### Lightings

2 spots with sensor detector: 1 recessed LED down-light 6W - 540 lumens

## Electrical connections

Position height: 840mm from the ground 1 strong current socket 2 USB sockets (A and C type)

Ventilation

Air renewal: 320 m3/h

## Working tablet

Natural Hevea18 mm ou White or Black melamine top with Natural Hevea multi-ply edges

Working tablet size depending on configuration:

• 1 door:

• 2 doors

L. 600mm x D. 550 mm 730mm from the ground L. 600 mm x D. 900 mm 730mm from the ground





## Weight

Without packaging: ±600 kg



## Assembly

All myO products come with assembly instructions to ensure careful assembly.

